

1、SCOPE

This specification applies to CA83 series axial wet tantalum electrolytic capacitor (185℃) produced by Shenzhen Be-Top Electronic Components Co., Ltd.



2、Brief Introduction

CA83 series wet electrolyte tantalum capacitors (185℃) are fully and silver coating sealed with polar axial leads. The series capacitors are characterized by low DC Leakage, low dissipation factor, stable performances, high reliability and long life. It has good performance in high-temp environment. It can be used in the conditions of 185℃. CA83 Series meets the standard QJ/PWV224-2008 and it is widely used in oil & gas exploration & drilling equipments.

3、General Specification

- 1) Operating Temperature: -55℃ ~+185℃ (using derating voltage when the temperature is higher than 155℃). (see table 1)
- 2) Capacitance Tolerance: $\pm 10\%$ (K) , $\pm 20\%$ (M), $-10\% \sim +30\%$ (S)
- 3) Current Leakage:
At 25℃: $I_0 \leq 0.002C_R U_R$ (μA) or 2μA (Whichever is greater)
At 185℃: $I_0 \leq 0.04C_R U_R$ (μA) or 40μA (Whichever is greater)
- 4) Dissipation Factor at 25℃ 100Hz frequency(see table 1).
- 5) Product Dimension and max weight (see table 2).

Table 1: Relation between Rated Voltage, Derating Voltage and Capacitance


Rated Voltage U_R (V)	Derating Voltage U_c (V)	Case Code	Capacitance C_R (μ F)	tg δ (%) 25℃	Rated Voltage U_R (V)	Derating Voltage U_c (V)	Case Code	Capacitance C_R (μ F)	tg δ (%) 25℃
6.3	3	1	22	45	40	15	3	100	45
		1	33	45			4	150	45
		1	47	45			5	220	45
		1	68	45	50	20	1	3.3	10
		2	100	50			1	4.7	15
		2	150	50			1	6.8	15
		3	220	70			1	10	15
		3	330	75			2	15	15
		4	470	95			2	22	20
		4	680	95			2	33	25
		5	1000	100			3	47	25

Rated Voltage $U_R(V)$	Derating Voltage $U_c(V)$	Case Code	Capacitance $C_R(\mu F)$	$\tan \delta$ (%) 25°C	Rated Voltage $U_R(V)$	Derating Voltage $U_c(V)$	Case Code	Capacitance $C_R(\mu F)$	$\tan \delta$ (%) 25°C
10	5	1	15	40	50	20	4	68	35
		1	22	40			4	100	35
		1	33	40			5	150	30
		1	47	45	63	25	1	3.3	10
		1	68	45			1	4.7	15
		2	100	50			1	6.8	15
		2	150	60			1	10	15
		3	220	65			2	15	15
		3	330	80			2	22	20
		4	470	85			3	33	25
		4	680	85			3	47	25
							4	68	35
							5	100	35
							6	150	30
16	7	1	10	30	75	30	1	3.3	10
		1	15	30			1	4.7	10
		1	22	35			1	6.8	15
		1	33	35			2	10	20
		1	47	40			2	15	25
		2	68	40			3	22	35
		2	100	45			3	33	35
		3	150	45			4	47	33
		3	220	70			5	68	30
		4	330	80			6	120	30
		4	470	85			1	3.3	10
							2	4.7	10
25	10	1	6.8	20	100	40	2	6.8	15
		1	10	20			3	10	20
		1	15	20			3	15	25
		1	22	25			4	22	35
		1	33	25			5	33	35
		2	47	30			6	47	33
		2	68	30			7	68	30
		2	100	40			2	3.3	10
		3	150	45			3	4.7	10
		4	220	60			3	6.8	15
		4	330	60			3	10	25
							4	15	25
40	15	1	4.7	15	125	55	5	22	30
		1	6.8	20			6	33	35
		1	10	20			7	47	30
		1	15	25					
		1	22	30					
		2	33	30					
		2	47	35					
		2	68	30					

Table 2: Product Dimension and Max Weight

Case Code	Max Weight (g)	Without Insulation Sleeve		With Insulation Sleeve	
		$D \pm 0.5(\text{mm})$	$L \pm 2(\text{mm})$	$D_1 \text{max}(\text{mm})$	$L \text{ max}(\text{mm})$
1	4	5	14	5.8	16
2	5	6	16	6.8	18
3	7	8	16	8.8	18
4	10	8	22	8.8	24
5	14	10	22	10.8	24
6	17	10	25	10.8	27
7	20	10	30	10.8	32

Figure of Product

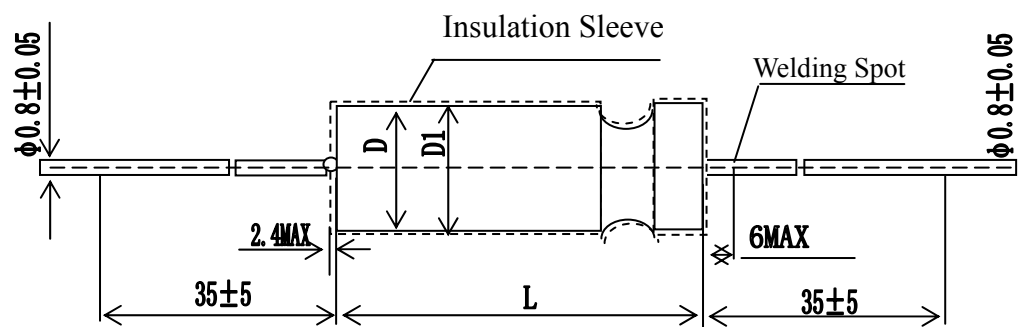

How to order

CA83-107M025

CA83	107	M	025
Type	Capacitance	Tolerance	Rated Voltage
CA83 Series axial wet tantalum capacitor (185°C)	107=100μF	K=±10% M=±20% S=−10%~+30%	6.3V=006
			10V=010
			16V=016
			25V=025
			40V=040
			50V=050
			63V=063
			75V=075
			100V=100
			125V=125