


- A、适用于回流焊**
B、适用于高密度表面组装
C、性能稳定，可靠性高。
D、寿命：105°C，2000小时
A、Reflow soldering is available
B、Available for high density surface mounting
C、High stability and reliability
D、Lifetime:105°C,2000Hr

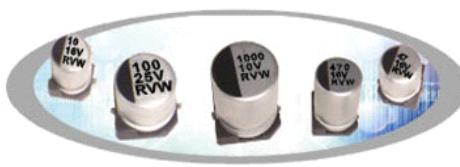


※ 主要技术性能 Specifications

使用温度范围 Operating Temperature Range	-55~+105°C							
额定电压范围 Rated Voltage Range	6.3~100V DC							
标称电容量范围 Nominal Capacitance Range	4.7~1500 μF							
标称电容量允许偏差 Capacitance Tolerance	±20%(120Hz,20°C)							
漏电流 (20°C) Leakage Current	1≤0.01C _R U _R (μA)或3μA取较大者 (2分钟) 1≤0.01C _R U _R (μA) or 3μA Whichever is greater(after 2 minutes)							
损耗角正切值 Dissipation Factor(120Hz 20°C)	U _R (V)	6.3	10	16	25	35	50	63
	tgδ	0.26	0.22	0.20	0.18	0.16	0.14	0.14
温度特性 (120Hz) Temperature Characteristics Impedance Ratio(120Hz)	U _R (V)	6.3	10	16	25	35	50	63
	Z _{40°C} /Z _{20°C}	4	3	2	2	2	2	3
	Z _{40°C} /Z _{20°C}	8	6	4	4	3	3	4
耐久性 Load Life	+105°C施加额定电压2000小时，恢复16小时后，电容器应满足要求 After applying rated voltage for 2000 hours at +105°C and then resumed 16 hours. The capacitor shall meet the following limits.							
	电容量变化率 Capacitance change	≤±20%初始值(≤16V: ±25%初始值) ≤±20% of initial measured value (16V: Within ±25% of the initial value)						
	漏电流值 Leakage	≤初始规定值 ≤Initial specified value						
	损耗角正切值 Dissipation factor	≤200%初始规定值 ≤200% of initial specified value						
高温贮存 Shelf Life	+105°C，1000小时，恢复16小时后，电容器应满足下列要求。 After storage for 1000 hours at +105°C and then resumed 16 hours, the capacitor shall meet the following limits.							
	电容量变化率 Capacitance change	≤±20%初始值 ≤±20% of initial measured value						
	漏电流值 Leakage	≤2倍的初始规定值 ≤200% of initial specified value						
	损耗角正切值 Dissipation factor	≤200%初始规定值 ≤200% of initial specified value						
耐焊接热 Resistance to Soldering Heat	在250°C的条件下，电容器应在热板上保持30秒，然后从热板上取出电容器，让其在室温下恢复，电容器应满足以下要求： The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature, then meet the following requirement.							
	电容量变化率 Capacitance change	≤±10%初始值 ≤±10% of initial measured value						
	漏电流值 Leakage	≤初始规定值 ≤Initial specified value						
	损耗角正切值 Dissipation factor	≤初始规定值 ≤Initial specified value						


※ 尺寸及印字

Dimensions&Marking

(Φ 6.3~ 7.7)

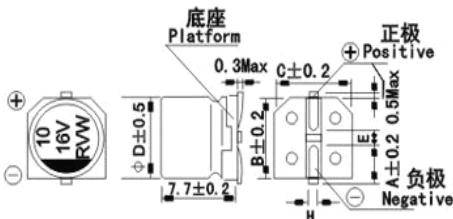

(Φ 8~ Φ10×10.2)

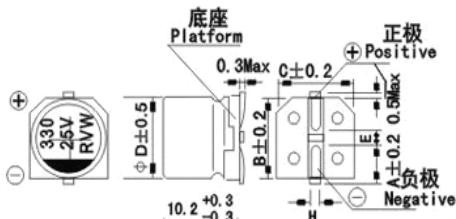

	Φ 6.3×7.7	Φ 8×10.2	Φ 10×10.2
A	2.5	2.9	3.2
B	6.6	8.3	10.3
C	6.6	8.3	10.3
E	1.8	3.1	4.2
L	7.7	10.2	10.2
H	0.5~0.8	0.8~1.1	

* 标称电容量、额定电压、额定纹波电流与外形尺寸对应表

Nominal capacitance, rated voltage, rated ripple current and case size table

电压 (V)	6.3		10		16		25	
μF 壳号	D×Lmm	105°CmA	D×Lmm	105°CmA	D×Lmm	105°CmA	D×Lmm	105°CmA
100							6.3×7.7	91
220	6.3×7.7	105	6.3×7.7	105	8×10.2 (6.3×7.7)	150 (105)	8×10.2	175
330	6.3×7.7	105	8×10.2	196	8×10.2	195	10×10.2 (8×10.2)	240 (220)
470	8×10.2	210	8×10.2	210	10×10.2 (8×10.2)	295 (230)	10×10.2	280
1000	10×10.2 (8×10.2)	300 (230)	10×10.2	315	10×10.2	340		
1500	10×10.2	315						

电压 (V)	35		50		63		100	
μF 壳号	D×Lmm	105°CmA	D×Lmm	105°CmA	D×Lmm	105°CmA	D×Lmm	105°CmA
4.7							6.3×7.7	35
10					6.3×7.7	39	8×10.2 (6.3×7.7)	77 (35)
22			6.3×7.7	51	8×10.2 (6.3×7.7)	98 (49)	10×10.2 (8×10.2)	126 (84)
33			6.3×7.7	60	6.3×7.7	112	10×10.2	133
47	6.3×7.7	70	8×10.2 (6.3×7.7)	120 (63)	10×10.2 (8×10.2)	160 (119)	10×10.2	140
100	8×10.2 (6.3×7.7)	120 (84)	10×10.2 (8×10.2)	170 (140)	10×10.2	196		
220	10×10.2 (8×10.2)	220 (190)	10×10.2	220				
330	10×10.2	245						
470	10×10.2	280						

额定纹波电流 Rated ripple current: (mA, 105, 120Hz) :

NOTE: All designs and specifications are for reference only and are subject to change without prior notice. If any doubt about safety for your application, Please contact us immediately for technical assistance before purchase
注:以上所提供的设计及特性参数仅供参考,任何修改不作预先通知,如在使用上有疑问,请在采购前与我们联络,以便提供技术上的协助。